

MEDIUM DUTY WINDSHIELD WIPER ARMS

(FOR USE WITH DOUBLE FLAT SHAFT & ARM DRIVER)

4000 SERIES (L.H.) ARC ARM



AVAILABLE IN:
 0 DEG. TO 30 DEG. SIDE BEND
 UP TO 22.5 IN. MAXIMUM LENGTH
 BLACK OR ANTI-GLARE FINISH
 SADDLE WIDTH: .218 IN.

6000 SERIES PANTOGRAPH ARM W/ADJ.IDLER



AVAILABLE IN:
 0 DEG. TO 12 DEG. DOWN BEND
 UP TO 28 IN. MAXIMUM LENGTH
 BLACK OR ANTI-GLARE FINISH
 SADDLE WIDTH: .218 IN.

5000 SERIES (R.H.) ARC ARM




AVAILABLE IN:
 0 DEG. TO 28 DEG. SIDE BEND
 UP TO 22.5 IN. MAXIMUM LENGTH
 BLACK OR ANTI-GLARE FINISH
 SADDLE WIDTH: .218 IN.

6500 SERIES: PANTOGRAPH ARM



AVAILABLE IN:
 0 DEG. TO 15 DEG. DOWN BEND
 UP TO 28 IN. MAXIMUM LENGTH
 BLACK OR ANTI-GLARE FINISH
 SADDLE WIDTH: .218 IN.

74000 SERIES (L.H.) ARC ARM

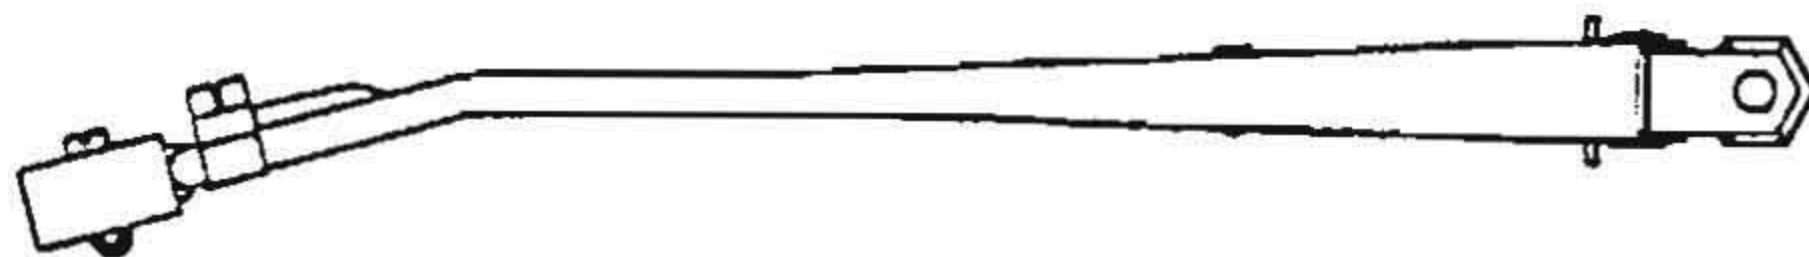

AVAILABLE IN:
 0 DEG. TO 30 DEG. SIDE BEND
 0 DEG. TO 15 DEG. DOWN BEND
 UP TO 28.75 IN. MAXIMUM LENGTH
 BLACK OR ANTI-GLARE FINISH
 SADDLE WIDTH: .605 IN.

7000 SERIES PANTOGRAPH ARM W/ADJ.IDLER



AVAILABLE IN:
 0 DEG. TO 15 DEG. DOWN BEND
 UP TO 28 IN. MAXIMUM LENGTH
 BLACK OR ANTI-GLARE FINISH
 SADDLE WIDTH: .605/.625 IN.

75000 SERIES (R.H.) PANTOGRAPH ARM



AVAILABLE IN:
 0 DEG. TO 20 DEG. SIDE BEND
 0 DEG. TO 15 DEG. DOWN BEND
 UP TO 28.75 IN. MAXIMUM LENGTH
 BLACK OR ANTI-GLARE FINISH
 SADDLE WIDTH: .605 IN.

7500 SERIES PANTOGRAPH ARM



AVAILABLE IN:
 0 DEG. TO 15 DEG. DOWN BEND
 UP TO 28 IN. MAXIMUM LENGTH
 BLACK OR ANTI-GLARE FINISH
 SADDLE WIDTH: .605/.625 IN.

MEDIUM DUTY

WINDSHIELD WIPER ARMS

(FOR USE WITH DOUBLE FLAT SHAFT & ARM DRIVER)

8000 SERIES PANTOGRAPH ARM W/ADJ. IDLER



AVAILABLE IN:

0 DEG. TO 15 DEG. DOWN BEND
UP TO 28 IN. MAXIMUM LENGTH
BLACK OR ANTI-GLARE FINISH
SADDLE WIDTH: .218 IN.

8500 SERIES PANTOGRAPH ARM



AVAILABLE IN:

0 DEG. TO 15 DEG. DOWN BEND
UP TO 28 IN. MAXIMUM LENGTH
BLACK OR ANTI-GLARE FINISH
SADDLE WIDTH: .218 IN.

9000 SERIES PANTOGRAPH ARM W/ADJ. IDLER



AVAILABLE IN:

0 DEG. TO 15 DEG. DOWN BEND
UP TO 28 IN. MAXIMUM LENGTH
BLACK OR ANTI-GLARE FINISH
FOR 1/4 IN PIN STYLE BLADE

9500 SERIES PANTOGRAPH ARM



AVAILABLE IN:

0 DEG. TO 15 DEG. DOWN BEND
UP TO 28 IN. MAXIMUM LENGTH
BLACK OR ANTI-GLARE FINISH
FOR 1/4 IN. PIN STYLE BLADE